PCT

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H01L 41/08, 21/318, 21/306	A1	(11) International Publication Number: **WO 95/34917** (43) International Publication Date: 21 December 1995 (21.12.95)

(71) Applicant: THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; University of California, Berkeley, Office of Technology Licensing, Suite 510, 2150 Shattuck Avenue, Berkeley, CA 94720-1620 (US).

(72) Inventors: LEE, Seung, S.; Apartment 32, 2389 Aberdeen Way, Richmont, CA 94806 (US). WHITE, Richard, M.; 350 Panoramic Way, Berkeley, CA 94704 (US). PISANO, Albert, P.; Apartment E, 2741 Dwight Way, Berkeley, CA 94704 (US).

(74) Agent: EGAN, William, J., III; Fish & Richardson P.C., Suite 100, 2200 Sand Hill Road, Menlo Park, CA 94025 (US).

(54) Title: CANTILEVER PRESSURE TRANSDUCER
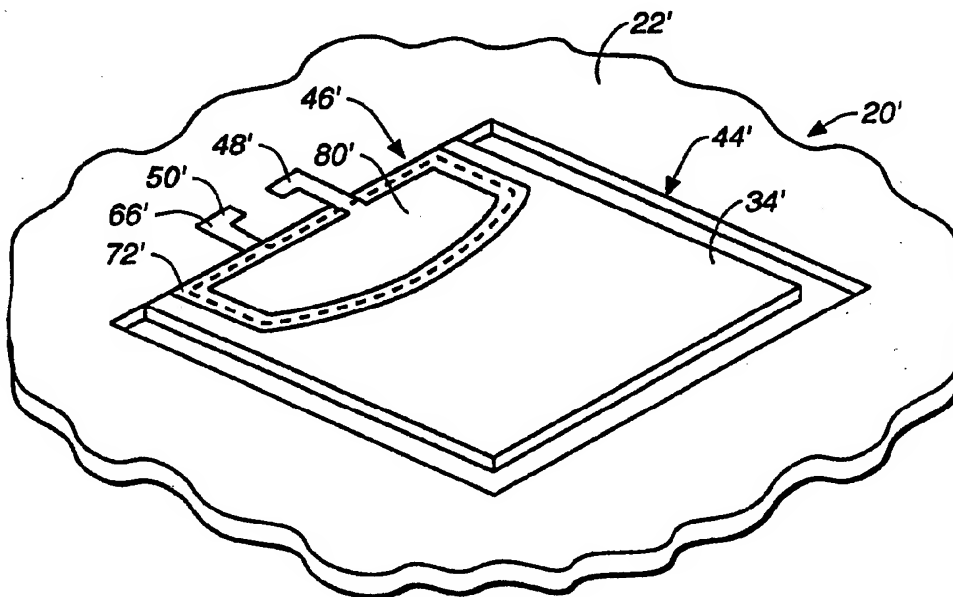
(57) Abstract

Micromachined cantilever pressure transducers (34), which work both as microphones and as microspeakers, are disclosed. These devices are made possible by novel methods for producing flat, thin film multilayer or polymeric cantilevers (34).

CANTILEVER PRESSURE TRANSDUCER

CROSS-REFERENCE TO RELATED APPLICATIONS
        This application is a continuation-in-part of
U.S. Patent Application Serial No. 08/072,294, filed
5   June 4, 1993, the disclosure of which is hereby
incorporated by reference.

BACKGROUND OF THE INVENTION
        The present invention relates generally to
micromachined pressure transducers, and more
10 particularly to a microphone or microspeaker comprising
a cantilever structure.
        Among the advantages of micromachining of
pressure transducers are improved dimensional control,
extreme miniaturization, the ability to integrate with
15 on-chip circuitry, and potential low-cost as a result of
batch processing.
        Acoustic pressure transducers function as
microphones or microspeakers. Microphones are pressure
sensors that detect airborne sound pressures that are
20 ten orders of magnitude lower than ambient pressure.
Hence, a microphone needs an extremely compliant
diaphragm to have an acceptable sensitivity. The
diaphragm is the member that moves in response to
changes in pressure.
25   The micromachined pressure sensors with
piezoelectric readout initially had relatively thick
diaphragms (on the order of tens of microns) bulk

-2-

micromachined from a substrate, such as single-crystal
silicon. Control of the thickness and of the latent
stress in such diaphragms was inadequate for use at very
thin dimensions. When use of very thin, of the order of
5 microns, diaphragms was attempted, the resulting
diaphragm was warped.

A novel process for low-stress silicon nitride
thin film deposition is disclosed in U.S. Patent No.
4,783,821, issued November 8, 1988. This process made
10 possible the fabrication of thin-film diaphragm pressure
transducers. The higher compliance of the thin-film
diaphragm allowed production of more sensitive
microphones. These and the earlier thick diaphragms are
clamped on all four edges or all four corners, resulting
15 in a tensioned diaphragm. The tensioning is necessary
to control the shape of diaphragms whose residual
stresses, together with the stresses of the transducers
attached to the diaphragms, tend to warp them, even in
the case of the newer low stress silicon nitride films.
20 The tension, however, decreases the compliance of the
diaphragm and, as a result, the sensitivity of the
microphone.

Cantilever diaphragms are much more compliant
than tensioned diaphragms. Use of a cantilever would
25 increase the sensitivity of a microphone and the
intensity of the output of a microspeaker. Maximizing
the effective device area, minimizing acoustic leakage
(reduction of the pressure difference on the two sides
of the diaphragm due to air flow around it), and
30 controllability of the device parameters, all require
fabrication of substantially flat diaphragms. This has
not heretofore been possible with thin-film, cantilever
diaphragm and transducer structures. Attempts to
fabricate such structures resulted not only in warped
35 diaphragms, but in many cases the residual stresses led
to breakage of the diaphragm during the cantilever
patterning.

-3-

Accordingly, an object of the present invention is to provide a micromachined pressure transducer having a cantilever diaphragm.

Another object of the present invention is to
5   provide a method for fabrication of a substantially flat cantilever diaphragm and transducer with high yield.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the
10   description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out in the claims.

15   SUMMARY OF THE INVENTION

The present invention is directed to a micromachined device having a cantilever structure covering the majority of an opening in a frame or substrate. When the cantilever structure is in
20   equilibrium, its deflection out of the plane of the opening is less than about 100 μm.

The cantilever structure may include three adjacent sublayers, the middle one designated the second sublayer, and the other two designated first and third.
25   The first and third sublayers have about the same average stress. The magnitude of the difference between the maximum and the minimum stress of the second layer, tensile and compressive stress being given opposite sign, is less than the magnitude of the average stress
30   of the first sublayer.

The method of the present invention includes providing an article comprising a substantially planar first thin film having first and second exposed surfaces. Second and third films are grown on the first
35   and second exposed surfaces of the first thin film. At least one slit is then etched through at least part of

-4-

the resulting thin film multilayer to define a
multilayer thin film cantilever.

                    BRIEF DESCRIPTION OF THE DRAWINGS
             The accompanying drawings, which are incorporated
5   in and constitute a part of the specification,
    schematically illustrate a preferred embodiment of the
    invention and, together with the general description
    given above and the detailed description of the
    preferred embodiment given below, serve to explain the
10 principles of the invention.
             Figure 1 is a perspective, partial cross-
    sectional view of a pressure transducer according to the
    present invention.
             Figures 2A-2I are cross-sectional views, at
15 several stages of fabrication of the transducer of
    Figure 1, along line 2-2 of Figure 1.
             Figure 3A is a perspective view of a pressure
    transducer according to another embodiment of the
    present invention.
20   Figure 3B is a perspective view of a patterned
    silicon wafer used as part of a mold for casting the
    frame and cantilever of the pressure transducer of
    Figure 3A.
             Figure 3C is a cross-sectional view of a mold for
25 casting the frame and cantilever of the pressure
    transducer of Figure 3A.
             Figure 4 is a graph of the surface profile of a
    cantilever structure according to the present invention.
             Figure 5 is a graphical illustration of the
30 residual stress as a function of thickness in a silicon
    nitride thin film.
             Figure 6A is a cross-sectional view of a silicon
    nitride thin film membrane grown in one direction with
    only one surface exposed during the growth.

Figure 6B is a schematic diagram of the residual stress as a function of thickness of the membrane of Figure 6A and of the bending tendency of the membrane.

Figure 7A is a cross-sectional view of a silicon
5   nitride thin film membrane grown according to the present invention.

Figure 7B is a schematic diagram of the residual stress as a function of thickness of the membrane of Figure 7A and of the bending tendency of the membrane.
10   Figure 8 is schematic diagram of the experimental set-up of the measurement of a microphone according to the present invention.

Figure 9 is a graph of the sensitivity of a microphone according to the present invention as a
15   function of frequency.

Figures 10A and 10B are schematic diagrams of the experimental set-up of the measurement of a microspeaker according to the present invention.

Figures 11A and 11B are graphs of the response of
20   a microphone according to the present invention as a function of frequency.

Figure 12 is a plan view of a pressure transducer according to the present invention shaped to increase the compliance of the cantilever diaphragm.
25   Figures 13 and 15 are plan views of pressure transducers according to the present invention comprising several cantilever structures.

Figures 14A-14C are cross-sectional views along line 14-14 of Figure 13 illustrating the possibility of
30   coupling neighboring cantilevers.

Figure 16 is a schematic cross-sectional view of a sound intensity meter.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will be described in terms
35   of a number of preferred embodiments. The preferred embodiments are thin film cantilever pressure

-6-

transducers and methods for fabrication of such
transducers. Such a structure 20 is shown in Figure 1.

Structure 20 comprises a substrate or frame 22
having a cavity 24. Substrate 22 may be 500-550 microns
5   (μm) thick as indicated by dimension "t". Cavity 24 has
openings 26 and 28 at surfaces 30 and 32 of substrate
22, respectively. Opening 26 may be a square having
sides 2000 μm long. Covering a majority of opening 26
is a thin film cantilever structure 34 which may be 2-4
10   μm thick. Cantilever structure 34 has one captive edge
36 and three free edges 38, 40 and 42. A gap 44
surrounds the free edges. Gap 44 may be 10 μm wide. In
order to minimize acoustic leakage, it is important to
minimize the area of gap 44, such that cantilever
15   structure 34 substantially covers opening 26. A
transducer 46 such as a piezoelectric transducer
overlaps cantilever structure 34 close to captive edge
36 but without overlapping substrate 22. Transducer 46
may comprise an insulated piezoelectric film sandwiched
20   between two electrode films, one of which is exposed at
the top surface of the transducer. For the sake of
clarity, the piezoelectric film and two electrode films
are not shown. Overlapping substrate 22 are contact 48
for the top transducer electrode and contact 50 for the
25   bottom transducer electrode. Transducer 46 has one edge
53 parallel and very close to the captive edge 36 of
cantilever structure 34, two other edges 52 and 54
parallel and close to edges 42 and 38 of the cantilever
structure, and one edge 56 which preferably has the
30   shape of a line of constant strain of cantilever
structure 34 when subject to a pressure difference at
its two surfaces.

The present invention may be practiced using
transducers other than piezoelectric. For example,
35   magnetostrictive, piezoresistive or, in the case of
microspeakers, thermal transducers could be used.

-7-

The fabrication of transducer 20 will be
described with reference to Figures 2A-2I. It may start
using a prime grade, 4-inch (100) crystalline
orientation silicon wafer as substrate 22. Silicon
5   dioxide films 58a and 58b, approximately 0.2 μm thick,
are thermally grown as shown in Figure 2A on surfaces 30
and 32 of substrate 22, respectively.

Low stress silicon nitride films 60a and 60b,
approximately 0.5 μm thick, are then grown using low
10 pressure chemical vapor deposition (LPCVD). The films
are grown for two hours at a temperature of 835 °C, in a
300 millitorr (mTorr) ambient of 6:1 ratio
dichlorosilane ($SiCl_2H_2$) and ammonia (NH_3).

Cavity 24 is fabricated next beginning with
15 patterning of films 58b and 60b and substrate 22.
First, the top surface of film 60a is covered with
photoresist, which is hard baked without any exposure or
developing. The back side of the substrate is next
masked with photoresist and openings are patterned in
20 the area to be etched to form cavity 24. Silicon
nitride film 60b is plasma etched using a mixture of
sulfur hexafluoride (SF_6) and helium. Thermal oxide 58b
is wet etched in buffered hydrofluoric acid (HF). The
photoresist is removed using an oxygen plasma and the
25 silicon dioxide and nitride films are used as a mask
during the silicon etching. Substrate 22 is wet etched
anisotropically using a solution of Pyrocatecol or
Catecol 320 g / Pyrazine 6 g / deionized water 320
milliliters (ml) / Ethylenediamine 1000 ml at 105 °C.
30 This solution does not appreciably etch <111> planes of
silicon, so that the resulting side walls of cavity 24
are <111> planes and there is very little undercut of
films 58b and 60b. The silicon dioxide film 58a exposed
by the etching of the substrate is next wet etched using
35 hydrofluoric acid (HF). The resulting structure or
article is shown in Figure 2B. The top opening of
cavity 24 is closed by a thin film membrane 61. At this

-8-

stage in the processing, membrane 61 is made of silicon
nitride film 60a, but in subsequent processing steps, as
discussed below, additional films will be added to
membrane 61, on both sides of film 60a.

5   Silicon nitride films 62a, 62b and silicon
dioxide films 64a, 64b are deposited next using LPCVD.
Films 62a, 62b are low stress silicon nitride,
approximately 0.5 μm thick. These films are deposited
for two hours at 835 °C, in a 300 millitorr (mTorr)

10   ambient of 4:1 ratio $SiCl_2H_2$ and NH_3. Silicon nitride
has been deposited on both sides of membrane 61. Films
64a, 64b are low-temperature oxide (LTO) silicon
dioxide, approximately 0.2 μm thick. These films are
deposited for 10 minutes (min) at 450 °C, in an ambient

15   of 3:5 ratio silane (SiH_4) and oxygen. They are then
annealed in nitrogen at 950 °C for 20 min. Silicon
dioxide has been deposited on both sides of membrane 61.
The resulting structure is shown in Figure 2C.
          The lower electrode of transducer 46 is

20   fabricated next, by depositing and patterning a
polysilicon film. The polysilicon film is deposited by
LPCVD and patterned by plasma etching as well known in
the art. For example, an approximately 0.2 μm
polysilicon film may be deposited in one hour at 610 °C,

25   using 100:1 ratio of SiH_4 and phosphine (PH_3), followed
by annealing in nitrogen at 950 °C for 20 min.
Photoresist is then used to mask the area of the lower
electrode of transducer 46 (Figure 1). The backside of
the substrate is not masked, such that the polysilicon

30   on the back side is etched completely. The polysilicon
may be plasma etched in a mixture of carbon
tetrachloride (CCl_4), helium and oxygen. After removal
of the photoresist, the structure of Figure 2D is
obtained. Transducer bottom electrode 66 overlaps

35   membrane 61 close to its edge but without overlapping
substrate 22. Contact lead 68 overlaps substrate 22.

-9-

Insulating layers 70a and 70b, shown in Figure
2E, are next deposited. These layers are approximately
0.2 μm thick LPCVD silicon dioxide deposited in one hour
at 450 °C, using 60:100:10.3 $SiH_4/O_2/PH_3$. They are then
5   annealed in nitrogen at 950 °C for 20 min. Again, both
sides of membrane 61 are coated.

A piezoelectric zinc oxide (ZnO) film is then
deposited and patterned. The film is grown by RF-
magnetron sputtering onto a substrate heated to 200-300
10   °C, using a 1:1 mixture of argon and oxygen at a
pressure of 10 mTorr, to a thickness of approximately
0.5 μm. No film is deposited on the back side. The
film is patterned to form a pad 72 overlapping the
polysilicon electrode 66, by photolithography without
15   photoresist hard bake and wet etching using a 1:1:20
solution of acetic acid (CH_3COOH) / sulfuric acid (H_2SO_4)
/ H_2O. The photoresist is then removed using acetone,
methanol and water for 30 minutes in each successively.
The resulting structure is shown in Figure 2E.

20   A third layer of LPCVD silicon dioxide,
approximately 0.3 μm thick is then deposited to
encapsulate ZnO pad 72. As a result, films 74a and 74b
are deposited on the front and back of membrane 61,
respectively. The films are grown for 15 min at 450 °C,
25   in an ambient of 60:100:0.4 $SiH_4/O_2/PH_3$.

Contact holes for contact to lead 68 are then
etched through layers 74a and 70a. The holes are
patterned with photolithography and the back side of the
wafer is coated with photoresist to protect oxide films
30   64b, 70b and 74b. Holes 76 are then etched using
buffered hydrofluoric acid. After photoresist removal,
the structure of Figure 2F is obtained.

An aluminum film is next grown on the front side
of the wafer for contact pad 78 and electrode 80. The
35   film is sputtered to a thickness of approximately 0.8
μm, patterned by photolithography and wet etched as well
known in the art, using a potassium ferrocyanide

-10-

($K_3Fe(CN)_6$) / potassium hydroxide (KOH) solution. A
sacrificial backing aluminum film 82 is then sputtered
on the back side to a thickness of approximately 0.5 μm.
This film must be less than 1.5 μm thick to avoid

5   breaking membrane 61 with its residual stress, but must
be thick enough not to break when membrane 61 is etched
as described below. The resulting structure is shown in
Figure 2G.

          The shape of cantilever 44 is next defined by

10   etching gap 44 (Figure 1). After photolithography on
the front side, membrane 61 is etched down to the
sacrificial backing aluminum layer 82. Wet etching is
used for the silicon dioxide layers, and plasma etching
for the polysilicon and silicon nitride layers as

15   described above, resulting in the structure of Figure
2H. Aluminum layer 82 increases the yield by preventing
breakage of membrane 61 during this etching step.

          Finally, sacrificial backing layer 82 is removed
by wet etching after masking the front side to protect

20   electrode 80 and contact pad 78. After removing the
photoresist, the structure of Figures 1 and 2I is
obtained.

          The wafer may then be diced with a diamond saw,
and individual pressure transducers glued and wire-

25   bonded to ceramic packages which have a 3 millimeter
(mm)-diameter ventilation hole formed by a diamond
drill. The ventilation hole may be left open during
testing or sealed to form a 15 mm^3 back-cavity volume.
The ventilation hole may be sealed by gluing a suitable

30   backing over the hole on the underside of the ceramic
package.

          Figure 3A shows another pressure transducer 20'
according to the present invention. This transducer is
a polymeric cantilever structure with a thickness of a

35   few to tens of microns. Device 20' comprises a frame
22', a cantilever structure 34' and a transducer 46'.
Cantilever structure 34' is separated from frame 22' by

-11-

a gap 44' over part of the perimeter of structure 34',
and is attached to frame 22' over the rest of its
perimeter. Overlapping cantilever structure 34' near
the portion of its perimeter attached to frame 22' is
5   transducer 46'. Transducer 46' may comprise a
piezoelectric layer 72' sandwiched between a lower
electrode 66' and an upper electrode 80', having leads
50' and 48', respectively.

     With a suitable choice of materials, pressure
10   transducer 20' may be made thin and flexible.
Electrodes 66' and 80' and leads 50' and 48' may be thin
metal films, and frame 22', cantilever structure 34' and
piezoelectric layer 72' may be formed of polymeric
materials. For example, frame 22' and cantilever
15   structure 34' may be formed of a structure polymer such
as polycarbonate, polystyrene or polyimide. The
piezoelectric layer may be PvDF (polyvinylidene
difluoride) and TrFE (trifluoroethylene). Such a
polymeric pressure transducer may be made integral with
20   other polymer-based objects such as credit cards and
smart cards.

     Frame 22' and cantilever structure 34' may be
cast at the same time using a reusable micromachined
mold that may be advantageously made by etching a
25   silicon wafer 86 (Figure 3B) to form features 88 raised
above surface 87 from a few to tens of microns.
Features 88 have the shape of the gap 44' to be formed
in the resulting polymer structure. Before casting, the
surface 87 of mold wafer 86 may be coated with a mold
30   release agent such as a silating agent with fluorocarbon
backbone, assuming the mold is made of silicon. Mold
wafer 86 may then be coated with a structure polymer
precursor, after which a second, flat wafer 90 is put on
top of wafer 86. Figure 3C is a cross-sectional view of
35   the resulting assembly. This arrangement limits the
thickness of the structural polymer coating so that it
does not overflow features 88.

-12-

After polymerization which may be accomplished using a variety of well-known methods, wafer 90 may be removed but frame and cantilever structure 22' and 34' should be left in place on wafer 86 for ease of handling
5 during subsequent processing steps.

Transducer 46' is fabricated next. Lower electrode 66' may be evaporated through a shadow mask. The piezo polymer layer 72' may then be applied by spinning on while an aperture mask is in place over the
10 underlying structure. Upper electrode 80' is then applied, also by evaporation through a shadow mask. Piezoelectric layer 72' may then be poled by applying a voltage between electrodes 66' and 80' during which time the piezoelectric layer is heated and then allowed to
15 return to room temperature.

The advantages of the process described above with reference to Figures 2A-2I will be discussed next. It is desired that the resulting cantilever structures 34 (Figure 1) have out-of-plane deflections less than
20 100 μm at equilibrium (i.e., when not acted upon by external forces), preferably less than 50 μm and more preferably significantly less than 50 μm. Figure 4 shows the profile of the highest-deflection section of an actually fabricated cantilever structure, such as
25 structure 34 of Figure 1, as measured by a profilometer. The vertical axis indicates deflection in microns, and the horizontal axis indicates the position along the cantilever in microns, the captive edge of the cantilever being at a position "x" of approximately 400
30 μm from the origin. As can be seen, the out-of-plane deflection of the transducer is less than 20 μm. By means of non-contact optical measurements, it has been verified that the profile of Figure 4 is accurate to within experimental error of 3 μm. Across a given
35 wafer, the majority of the transducers of the present invention have out-of-plane deflections below 35 μm.

-13-

Cantilever structures fabricated with the entire
silicon nitride deposition as a single layer before the
substrate etching were significantly curled upward or
downward. As discussed above, this is undesirable
5   because it decreases the effective device area upon
which the sound wave impinges in the case of a
microphone, or which launches the sound wave in the case
of a microspeaker. Additional reasons why a curled
cantilever structures are undesirable are an increase in
10   acoustic leakage and possible lack of controllability of
the device characteristics.

The downward curl is due to the high residual
compressive stress of the ZnO layer of the piezoelectric
transducer. It was found that the curl is considerably
15   reduced by patterning the ZnO, such as layer 72 of
transducer 46 (Figure 2I), so that it does not overlap
the silicon frame.

The upward curl of the single silicon nitride
layer cantilever structures arises because of the
20   gradient of residual stress of the silicon nitride,
which is illustrated in Figure 5 for a typical film
deposited as a single layer onto a bulk substrate, such
as film 91 of Figure 6A. The stress profile of Figure 5
has been obtained by successively removing thin layers
25   of such a film and measuring wafer curvature. In Figure
5, the vertical axis indicates position along the
thickness of a film and the horizontal axis indicates
residual stress in megaPascal (MPa), positive for
tensile stress and negative for compressive stress. The
30   stress distribution in the silicon nitride seems to be
related to annealing during the deposition at 835 °C.
The earlier a layer is deposited, the longer this layer
is annealed. The gradient in the residual stress of a
film grown onto a surface of a bulk substrate in only
35   one direction, such as silicon nitride film 91 in Figure
6A, generates a moment that causes the upward curl,
indicated by arrow A in Figure 6B where the vertical

-14-

axis indicates position along the thickness of film 91
and the horizontal axis indicates residual stress.
Cavity 93 of Figure 6A was etched, after the growth of
film 91, in substrate 95.

5   Figure 7A shows the solution used in the process
flow of Figures 2A-2I in order to produce a cantilever
with a symmetric stress distribution in the silicon
nitride. It should be noted that the stress
distribution in the finished diaphragm, with outer

10   silicon dioxide layers, will also be symmetric for the
reasons given below. The initial approximately $0.5-\mu m$-
thick silicon nitride layer 92, corresponding to layer
6a in Figure 2I, is deposited with a 6:1 reactant gas
ratio to form the diaphragm prior to bulk

15   micromachining. The low (50 MPa) residual tensile
stress of the thin, initial diaphragm makes it more
resistant to rupture.

      After bulk micromachining, the second
approximately $0.5-\mu m$-thick low-stress silicon nitride

20   94, corresponding to layers 62a and 62b in Figure 2I, is
deposited with a 4:1 reactant gas ratio. The larger
tensile stress (250 MPa) of the second layer is used to
maintain diaphragm flatness during subsequent processing
steps. Since the second silicon nitride deposition

25   occurs on both sides of the original diaphragm, the
stress gradients become symmetric as shown in Figure 7B.
The first silicon nitride layer is also annealed during
the second layer deposition and its stress distribution
becomes negligible. The result is a relatively flat

30   cantilever. This technique of producing a flat
cantilever despite the stress gradient in the component
films may have applications to other micromachined
structures.

      The microphone frequency response of the

35   structure of Figure 1 has been measured using the
arrangement of Figure 8. The measurement was made in an
electrically shielded anechoic chamber 96 containing a

-15-

calibrated reference microphone 100. The test
(cantilever diaphragm) microphone 98 of the present
invention (whose structure 20 is shown in Figure 1), and
reference microphone 100, respectively, were placed at

5   the same distance from the source of acoustic signals,
which was at the end of a 6.5 mm diameter tube 102 that
leads into the chamber from an external conventional
loudspeaker 104 driven by spectrum analyzer 108. The
output signals of test microphone 98 and reference

10   microphone 100 were applied, using lead pairs 99 and 97,
respectively, to the input of a high input impedance
amplifier 106 connected to spectrum analyzer 108.

        Figure 9 shows the typical measured microphone
sensitivity (curve A) when tested without the above-

15   described ceramic package hole backing. The vertical
axis indicates sensitivity in mV/μbar (millivolts per
microbar, 1 bar = 10^5 Pa) and the horizontal axis
indicates the frequency. The microphone sensitivity is
fairly constant at 2 mV/μbar in the low frequency range

20   and rises to 20 mV/μbar at the lowest resonant frequency
of 890 Hz. The 2 mV/μbar is the highest reported for a
microphone with a micromachined diaphragm. The low-
frequency sensitivity and the resonant frequencies are
in good agreement with a simulation result given by

25   curve B. Independent testing showed that backing with a
15 mm^3 cavity reduces the low-frequency sensitivity by
about 8 decibels (dB), to around 0.8 mV/μbar. The
simulation result was obtained using a combination of
finite-element simulations and analytical modeling.

30   The microspeaker frequency response of the
structure of Figure 1 has been measured using the
arrangement of Figures 10A and 10B. The acoustic output
of the cantilever device 110 of the present invention
(whose structure 20 is shown in Figure 1), driven by

35   spectrum analyzer 108 through leads 109, was measured
using a 2 cm^3 coupler 112 with a calibrated microphone
114 connected to spectrum analyzer 108 with leads 107.

-16-

Figure 11A shows the microspeaker output in the 100 Hz
to 10 kHz frequency range with 4V (zero-peak) input
drive. Figure 11B shows the sound pressure level
produced by the microspeaker in the 1 kHz to 50 kHz
5   frequency range. In Figures 11A and 11B, the vertical
axis is sound pressure level in dB SPL (decibels sound
pressure level) and the horizontal axis is frequency.
The resonant frequencies coincide with those of the
microphone response at 890 Hz and 4.8 kHz, as expected.
10   The highest output pressure corresponds to approximately
100 dB SPL.

As shown in Figure 12, which is a plan view of a
cantilever pressure transducer 111 of the present
invention, the compliance of the diaphragm may be
15   further increased by reducing the length of the
diaphragm perimeter where the diaphragm is attached to
the frame 120 and providing a narrower portion 116
carrying transducer 46 near the captive edge of
diaphragm 34, where most of the diaphragm bending takes
20   place. Transducer 111 may be fabricated using either
the method of Figures 2A-2I or of Figures 3A-3C.

Figures 13 and 15 are plan views of cantilever
pressure transducers 119 and 121, according to the
present invention, respectively. Transducers 119 and
25   121 may be fabricated using either the method of Figures
2A-2I or of Figures 3A-3C. Transducers 119 and 121 have
a plurality of cantilever structures 117 sharing an
opening 118 in a frame 120. Transducer 119 has five
cantilever structures 117, and transducer 121 has eight
30   cantilever structures 117. In Figure 15, the opening is
substantially circular and the cantilever structures are
positioned substantially radially over the opening. As
shown in Figure 14A, the cantilever structures may be
free and separated by gaps 124, or, as shown in Figures
35   14B and 14C, the cantilever structures may be coupled by
thinner (120, Figure 14B) or corrugated (122, Figure
14C) diaphragms. These options provide additional

-17-

flexibility in the design of pressure transducers allowing control over the details of their frequency response.

Figure 16 shows how two cantilever pressure
5   transducers 126 and 128 can be stacked to form a sound intensity meter 132. As is well known, the upper limit of the frequency range over which the intensity meter is functional is increased by locating the pressure transducers closer to each other. Pressure transducers
10 126 and 128 may be located at a short distance relative to each other using spacers 130.

In summary, micromachined cantilever pressure transducers, such as microphones and microspeakers, and methods for their fabrication have been described. By
15 controlling the distribution of residual stress, 2000 μm long cantilevers were fabricated whose maximum out-of-plane deflections were typically no more than 35 μm. The microspeaker output is proportional to the input drive, and rises to approximately 100 dB SPL at 4.8 kHz
20 and 6V (zero-peak) drive. The microphone sensitivity is fairly constant at 2 mV/μbar in the low frequency range, and is 20 mV/μbar at the lowest resonant frequency of 890 Hz. The high microphone sensitivity and the high microspeaker output are due to the high compliance of
25 the cantilever diaphragm.

The present invention has been described in terms of a preferred embodiment. The invention, however, is not limited to the embodiment depicted and described. Rather, the scope of the invention is defined by the
30 appended claims.

-18-

WHAT IS CLAIMED IS:

1.   A micromechanical device comprising:
a frame having an opening; and
at least one cantilever structure attached
5 to said frame over a portion of a perimeter of said
opening and covering a majority of said opening; and
wherein when said cantilever structure is in
equilibrium, its deflection out of the plane of said
opening is less than about 100 μm.

10   2.   The device of Claim 1 wherein said
cantilever structure includes silicon nitride.

3.   The device of Claim 1 wherein said frame and
said cantilever structure include a polymeric material.

4.   The device of Claim 1 further including a
15 second device according to Claim 1 at a predetermined
position to form a sound intensity meter.

5.   The device of Claim 1 further including a
transducer, said transducer overlapping said cantilever
structure and not overlapping said frame.

20   6.   The device of Claim 5 wherein said
transducer is from the group consisting of
piezoelectric, piezoresistive, capacitive,
magnetostrictive and thermal transducers.

7.   The device of Claim 5 wherein said
25 transducer includes a zinc oxide thin film.

8.   The device of Claim 1 wherein, when said
cantilever structure is in equilibrium, its deflection
out of the plane of said opening is less than about 50
μm.

9.   The device of Claim 8 wherein said cantilever structure includes silicon nitride.

10.   The device of Claim 8 wherein said frame and said cantilever structure include a polymeric material.

5   11.   The device of Claim 8 further including a transducer, said transducer overlapping said cantilever structure and not overlapping said frame.

12.   The device of Claim 11 wherein said transducer is from the group consisting of

10   piezoelectric, piezoresistive, capacitive, magnetostrictive and thermal transducers.

13.   The device of Claim 11 wherein said transducer includes a zinc oxide thin film.

14.   A micromechanical device comprising:

15   a substrate having a first and second surfaces and a cavity with an opening at said first surface; and

          at least one multilayer cantilever structure attached to said first surface of said substrate over a

20   portion of a perimeter of said opening and covering a majority of said opening; and

          wherein said cantilever structure includes three adjacent sublayers designated first, second and third such that said second sublayer is adjacent to said

25   first and third sublayers; said first and third sublayers having about the same average stress; said second sublayer having a maximum stress and a minimum stress, compressive and tensile stresses considered to have opposite sign; and the magnitude of the difference

30   between said maximum stress and said minimum stress being less than the magnitude of the average stress of said first sublayer.

15.   The device of Claim 14 wherein said first,
second and third sublayers include silicon nitride.

16.   The device of Claim 14 further including a
transducer, said transducer overlapping said cantilever
structure and not overlapping said substrate.

17.   The device of Claim 16 wherein said
transducer is from the group consisting of
piezoelectric, piezoresistive, capacitive,
magnetostrictive and thermal transducers.

18.   The device of Claim 16 wherein said
transducer includes a zinc oxide thin film.

19.   The device of Claim 14 wherein said first
and third sublayers have opposite stress gradients.

20.   The device of Claim 19 wherein said first,
second and third sublayers include silicon nitride.

21.   The device of Claim 19 further including a
transducer, said transducer overlapping said cantilever
structure and not overlapping said substrate.

22.   The device of Claim 21 wherein said
transducer is from the group consisting of
piezoelectric, piezoresistive, capacitive,
magnetostrictive and thermal transducers.

23.   The device of Claim 21 wherein said
transducer includes a zinc oxide thin film.

24.   The device of Claim 14 wherein an average
stress of said second sublayer is less than the average
stress of said first layer.

-21-

25.   The device of Claim 24 wherein said first, second and third sublayers include silicon nitride.

26.   A method for fabrication of a thin film cantilever structure, comprising:
5   providing an article comprising a substantially planar first thin film, said thin film having first and second exposed surfaces;
              growing second and third thin films on said first and second surfaces, respectively, to form a thin
10   film multilayer; and
              etching at least one slit through at least part of the thin film multilayer to define at least one multilayer thin film cantilever.

27.   The method of Claim 26 further including:
15   growing a sacrificial backing layer before etching said slit; and
              etching said sacrificial backing layer after etching said slit; and wherein
              said sacrificial backing layer is not etched
20   when said slit is etched.

28.   The method of Claim 26 wherein said second and third films are grown at the same time.

29.   The method of Claim 28 wherein said second and third films are grown using chemical vapor
25   deposition.

30.   The method of Claim 29 wherein said second and third films include silicon nitride.

31.   The method of Claim 26 wherein said first film includes silicon nitride grown on a silicon
30   dioxide-coated substrate by chemical vapor deposition in

-22-

an atmosphere with ratio of silicon atomic content to
nitrogen atomic content of about 6:1.

32.   The method of Claim 26 further including a
step of growing fourth and fifth thin films on said
5   second and third thin films, respectively before the
etching of said slit.

33.   The method of Claim 32 further including
             growing a sacrificial backing layer before
etching said slit; and
10   etching said sacrificial backing layer after
etching said slit; and wherein
             said sacrificial backing layer is not etched
when said slit is etched.

34.   The method of Claim 32 wherein said fourth
15   and fifth films are grown at the same time.

35.   The method of Claim 34 wherein said fourth
and fifth films are grown using chemical vapor
deposition.

36.   The method of Claim 35 wherein said fourth
20   and fifth films include silicon dioxide.

37.   A method for fabrication of a polymeric
cantilever structure, comprising:
             providing a first mold element having
features raised above a first flat surface;
25   coating said first surface with a polymer
precursor;
             placing a second mold element with a second
flat surface parallel to the first surface and in
contact with the raised features; and
30   polymerizing said polymer precursor.

38.   A micromechanical device comprising:

a frame having an opening; and

a plurality of cantilever structures, said cantilever structures being attached to said frame over
5   portions of a perimeter of said opening and covering a majority of said opening; and

wherein when said cantilever structures are in equilibrium, their deflection out of the plane of said opening is less than about 100 μm.

10   39.   The device of Claim 38 wherein said opening is substantially circular and said cantilever structures are positioned substantially radially above said opening.

1 / 13
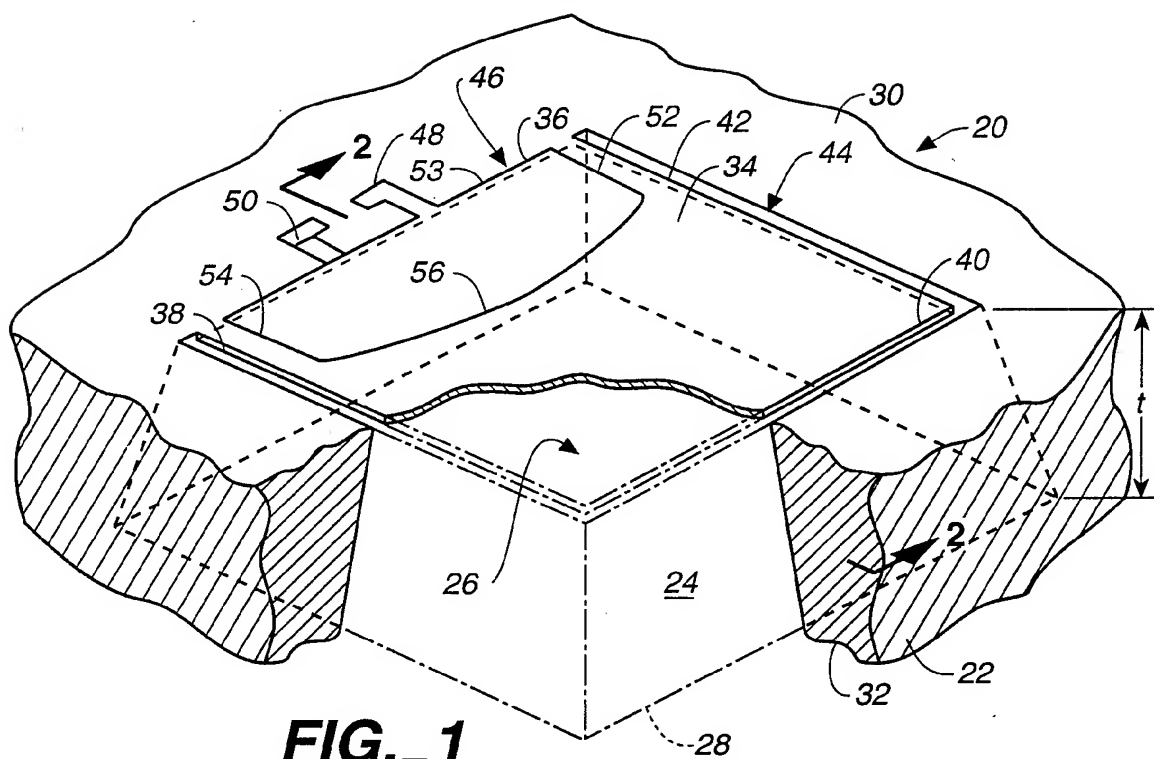
FIG._1

FIG._3A

FIG._2A

FIG._2B

FIG._2C

FIG._2D

FIG._2E

FIG._2F

FIG._2G

5 / 13

FIG._2H

FIG._2I
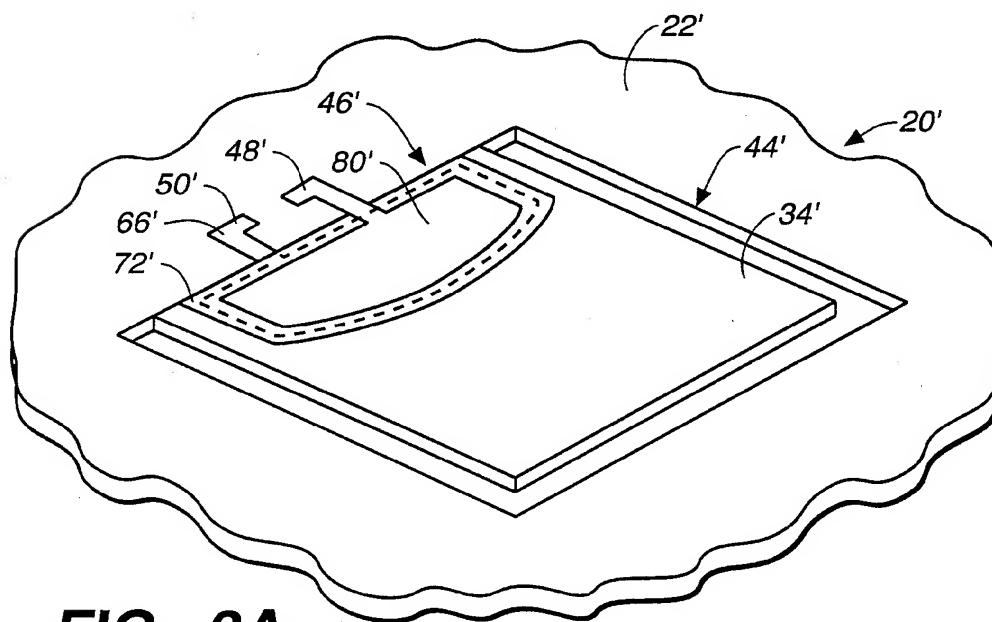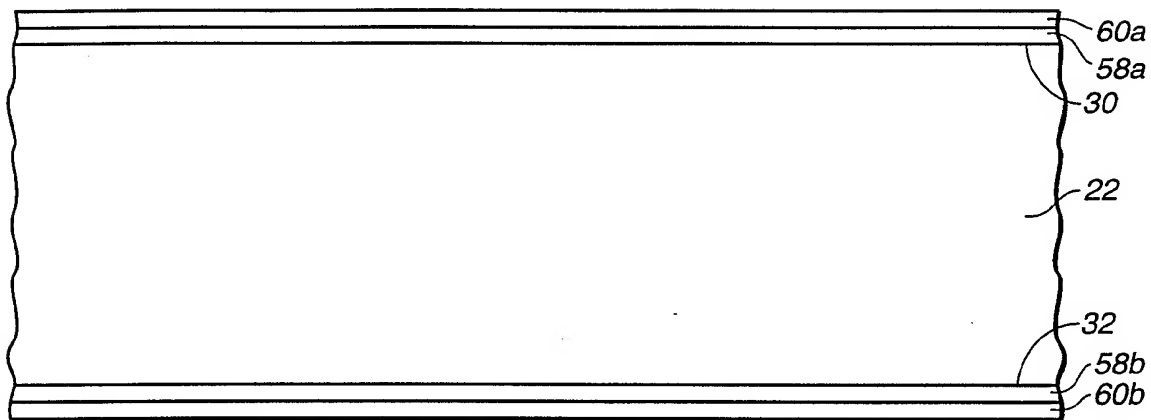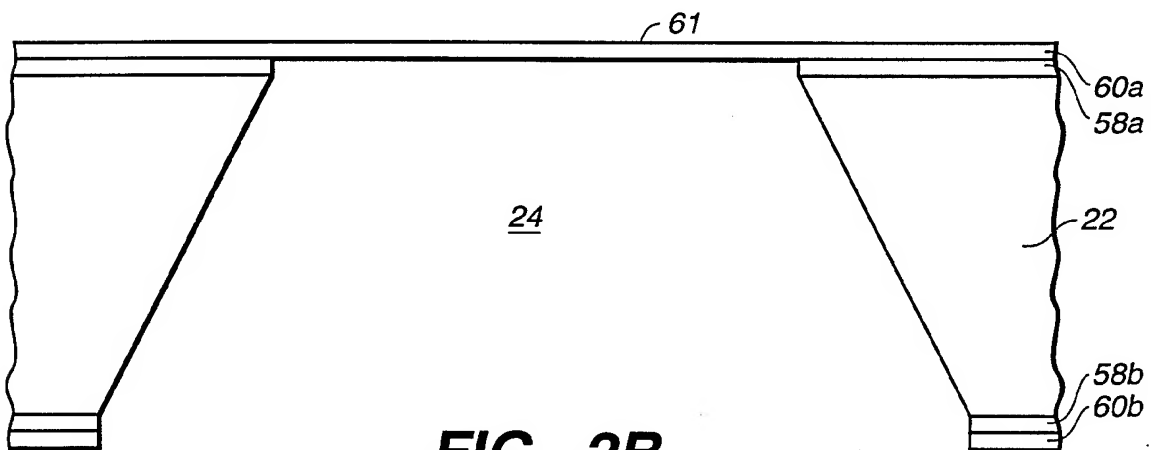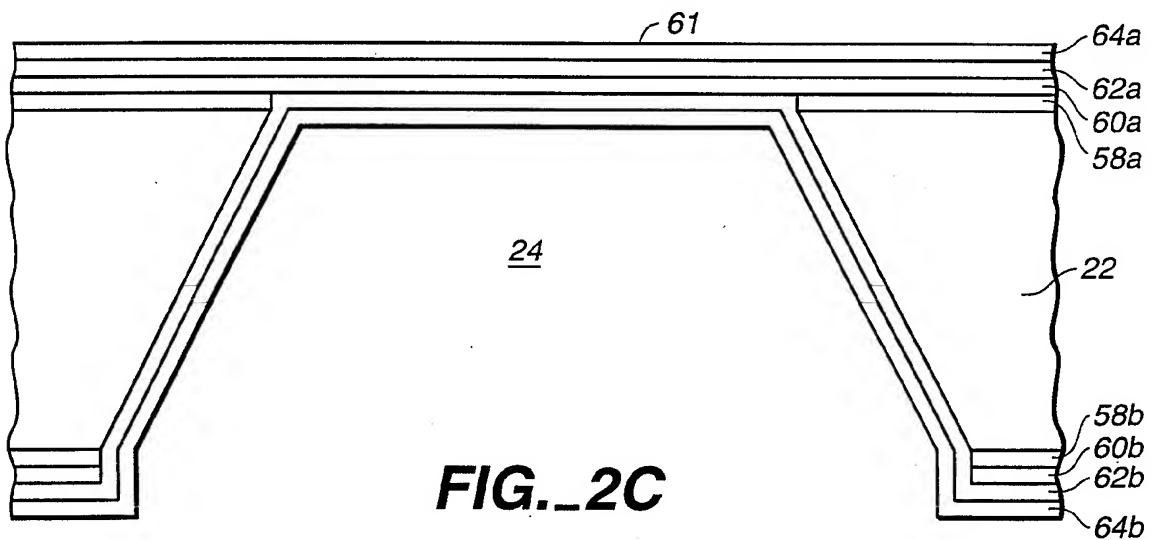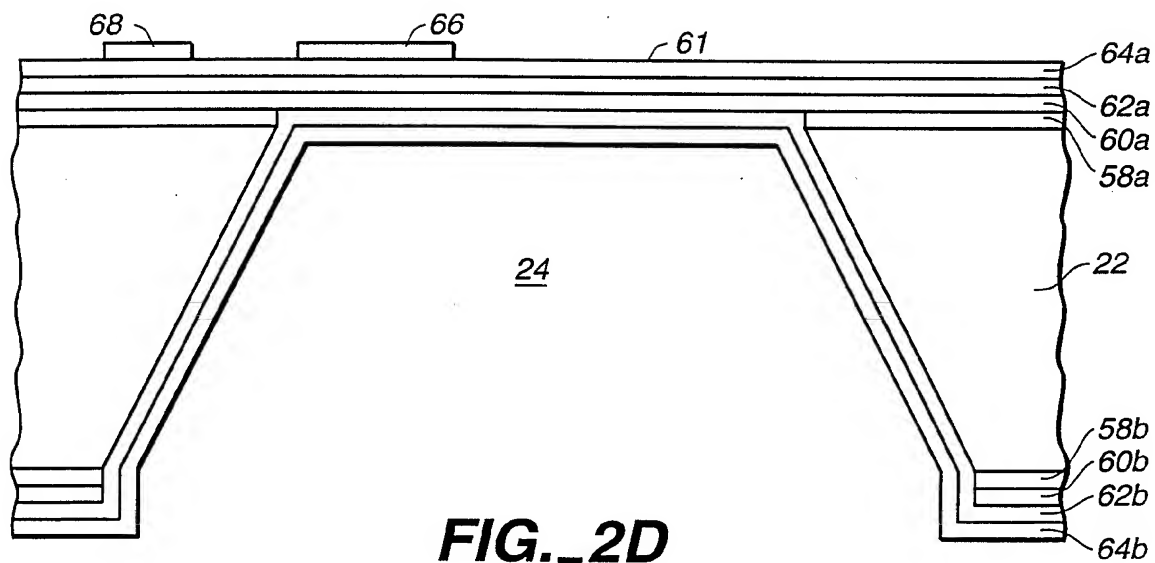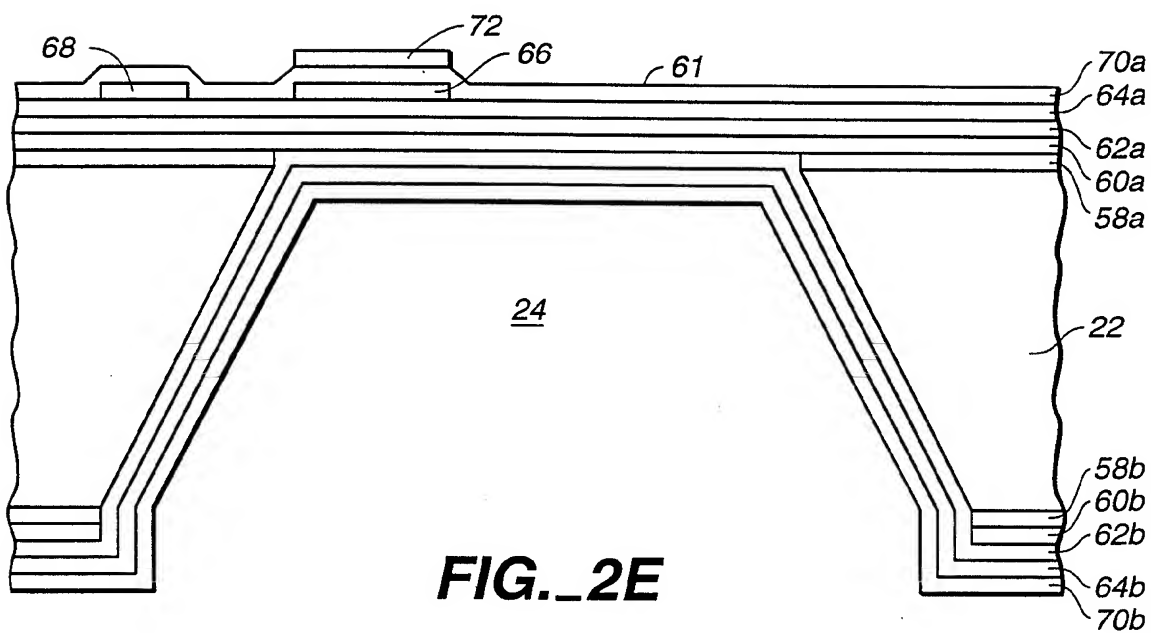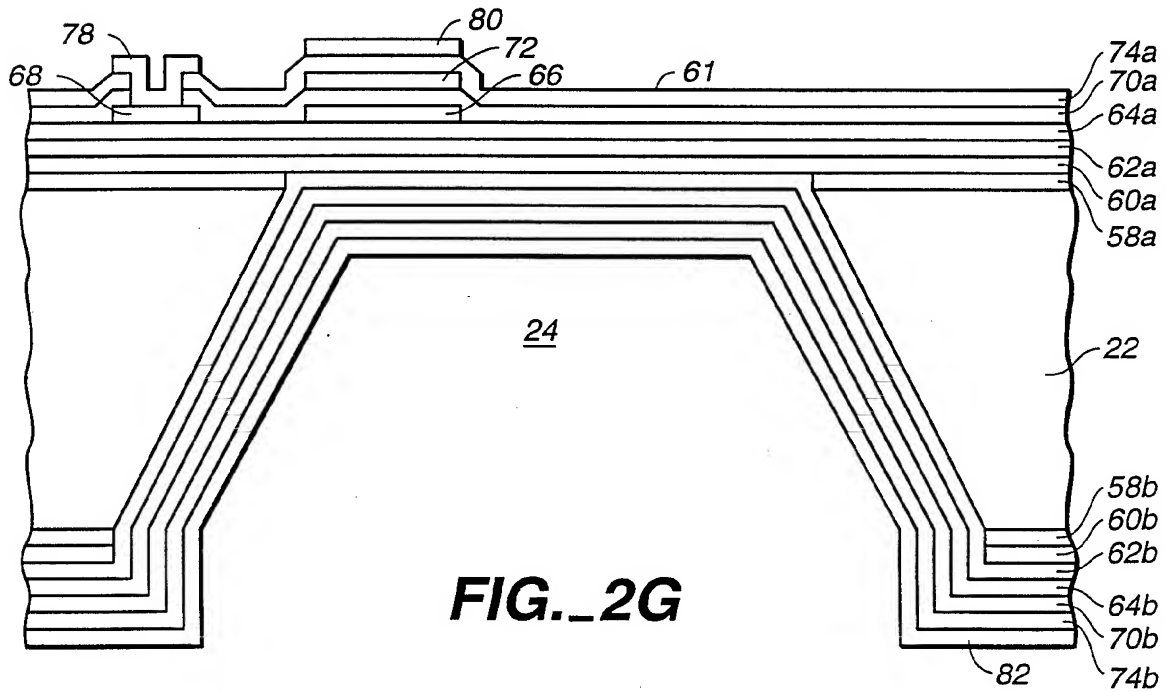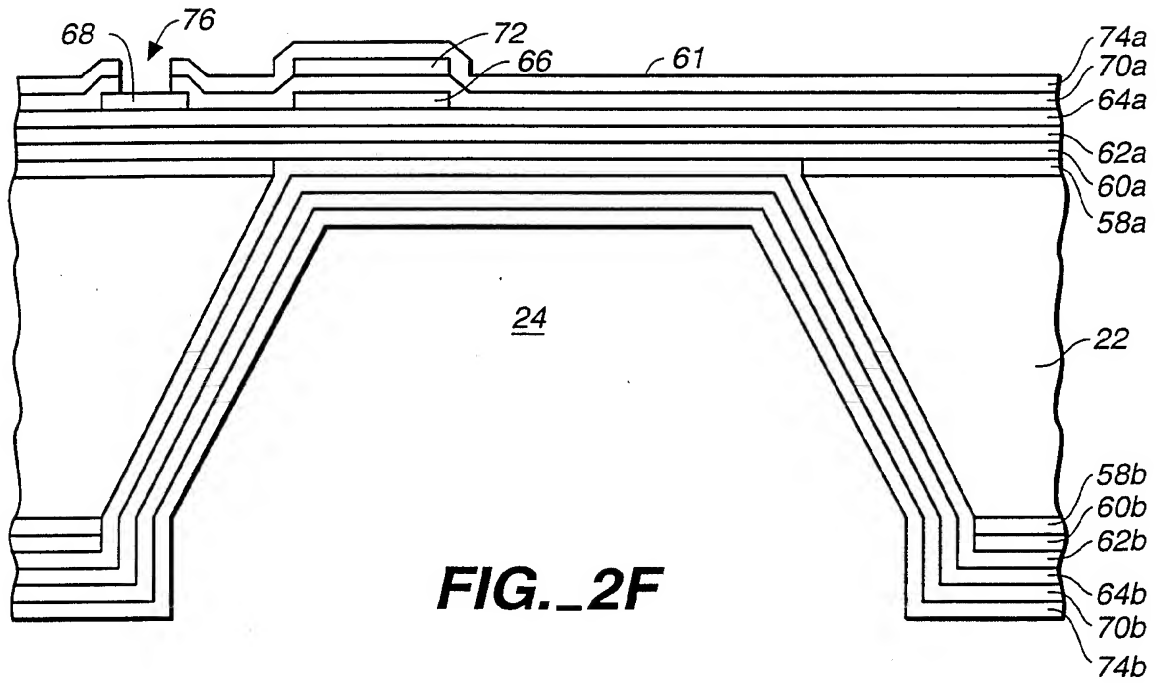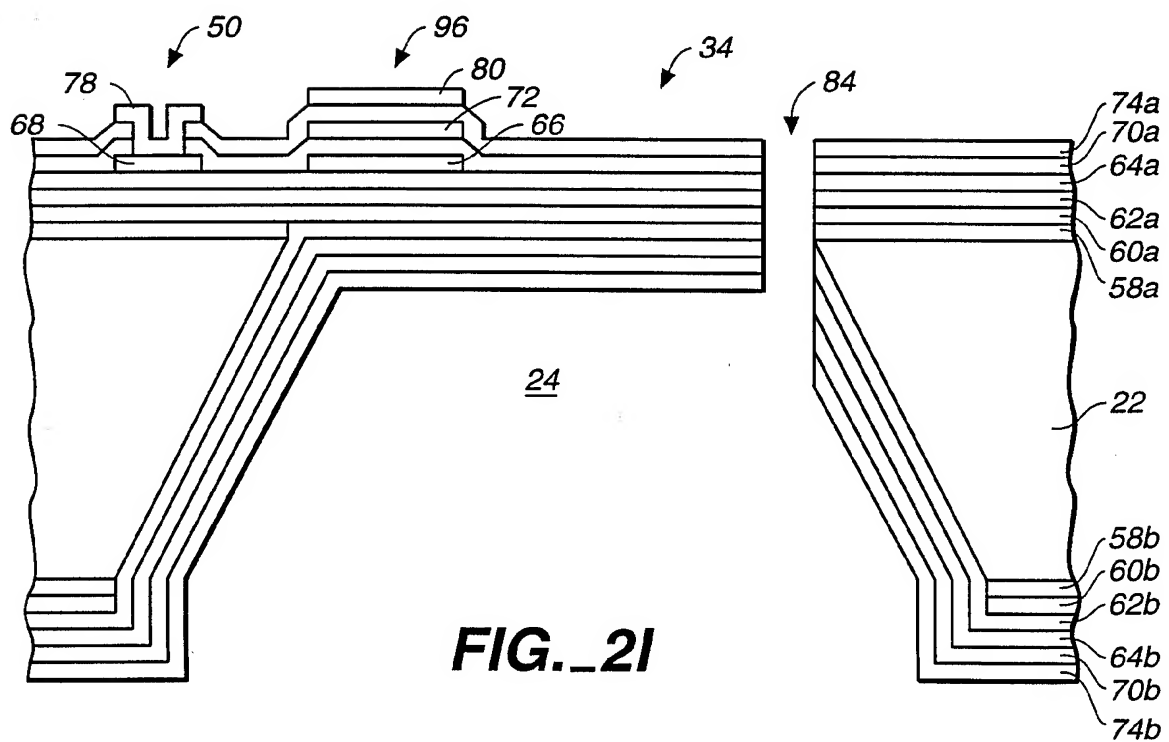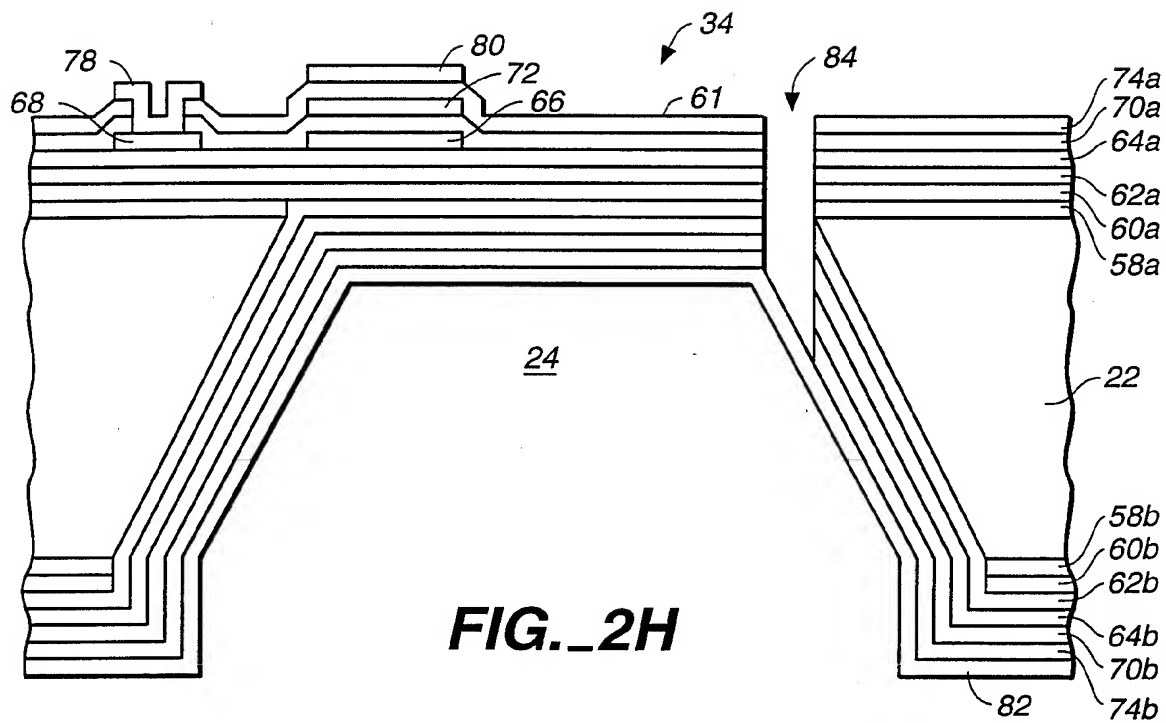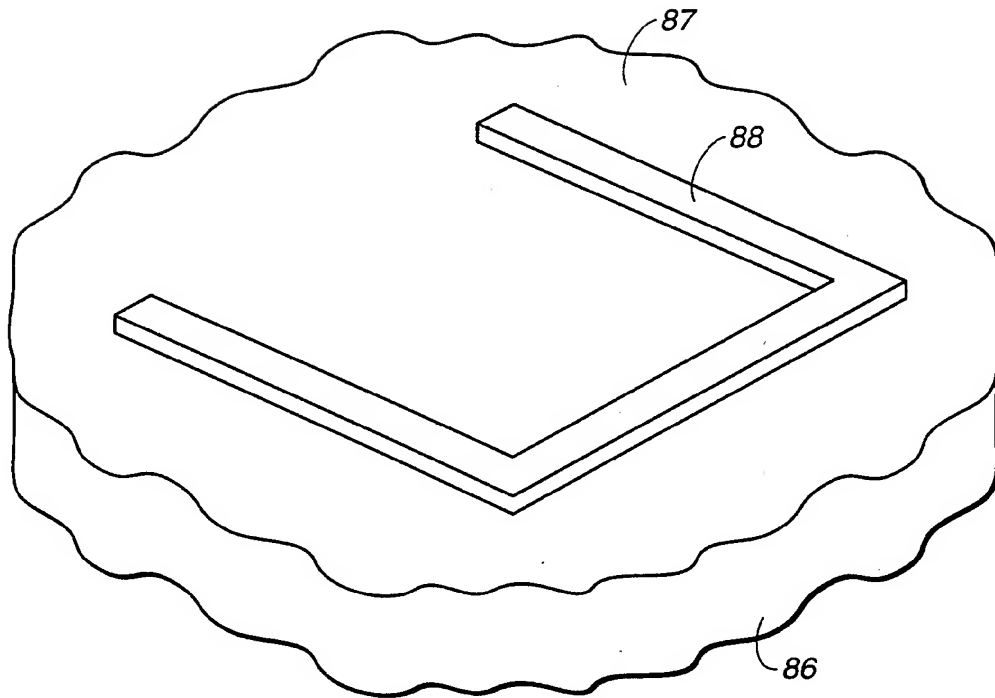
FIG._3B
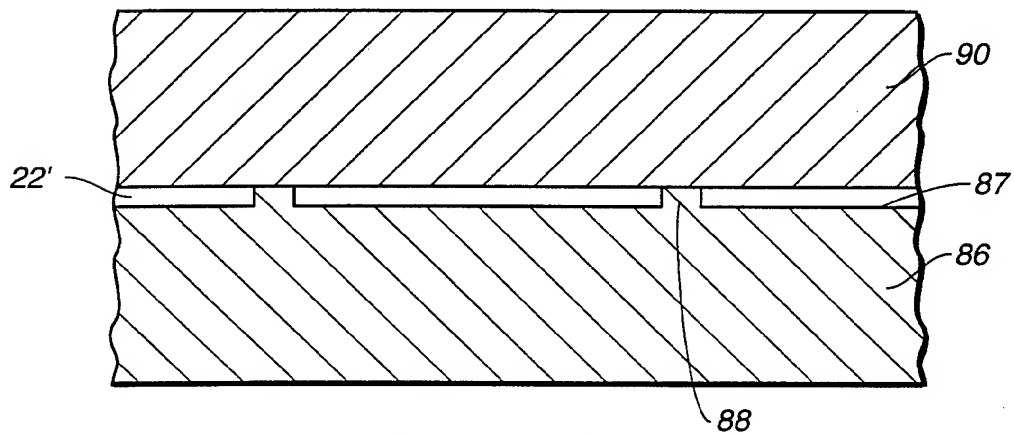
FIG._3C
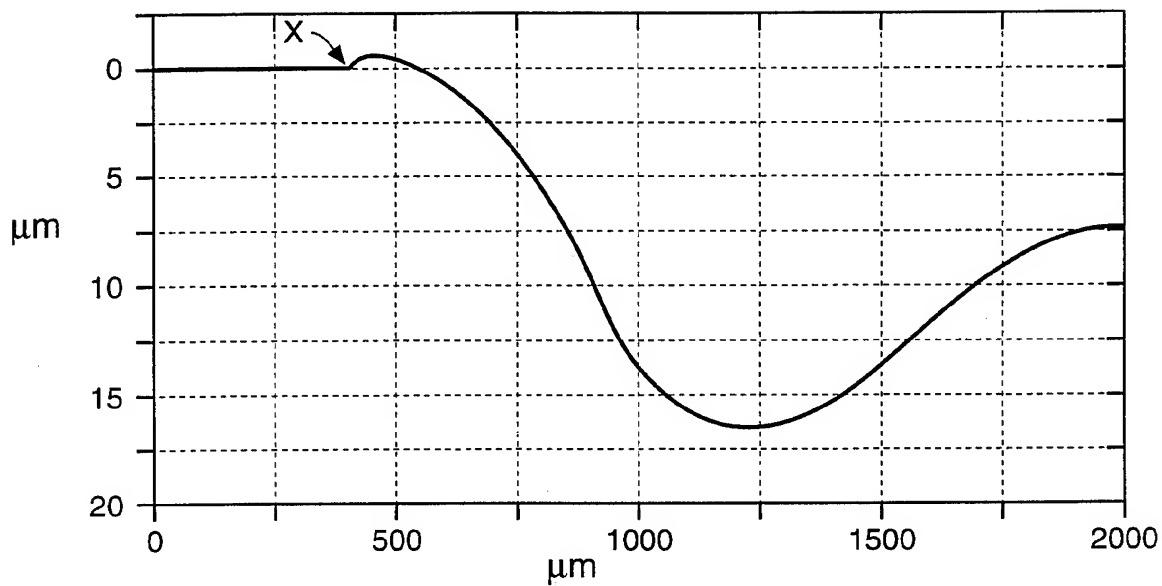
FIG._4
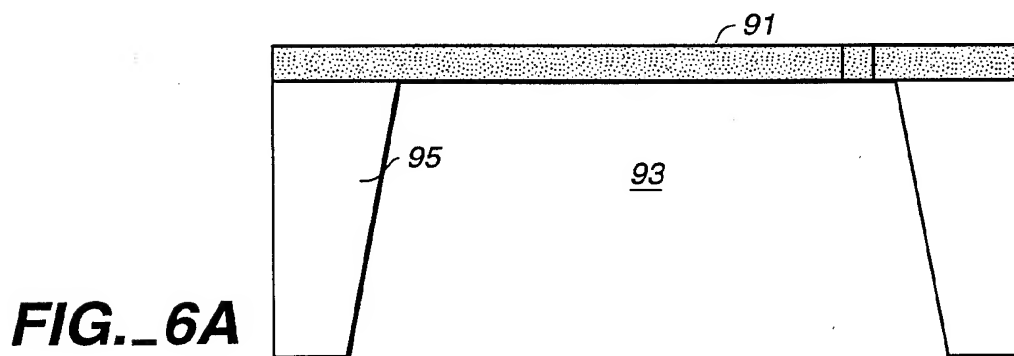
FIG._6A

FIG._6B

FIG._5

FIG._7A

FIG._7B

FIG._8

FIG._9   FREQUENCY (kHz)

108 SPECTRUM ANALYZER HP4195

114

107

112

109

110

FIG._10A

34

44

22

24

110

FIG._10B

111

116

34

46

36

120
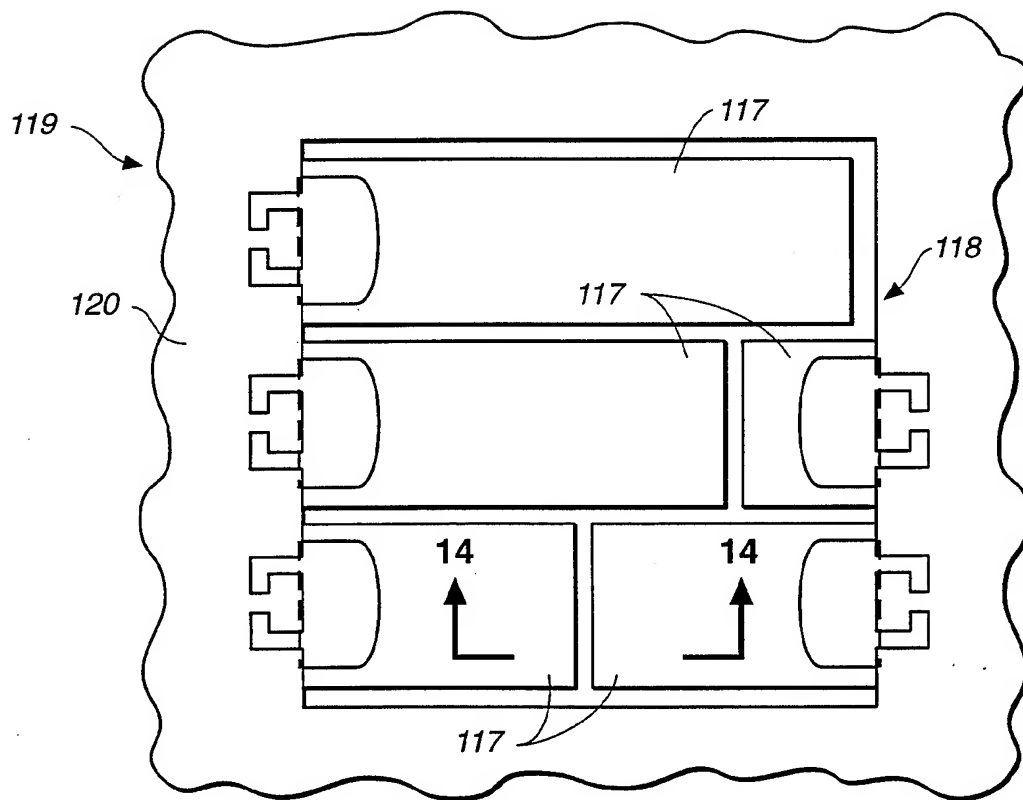
44
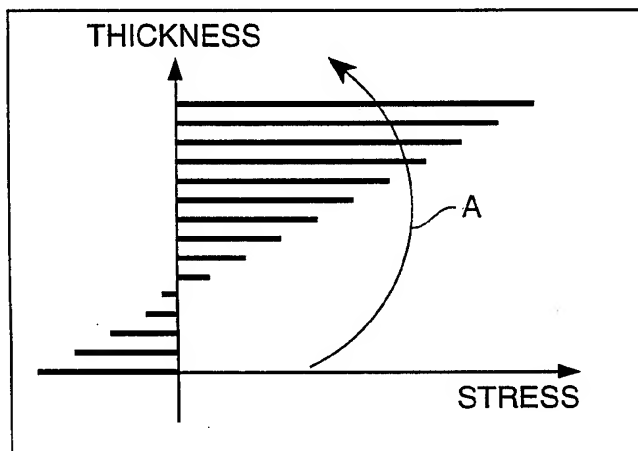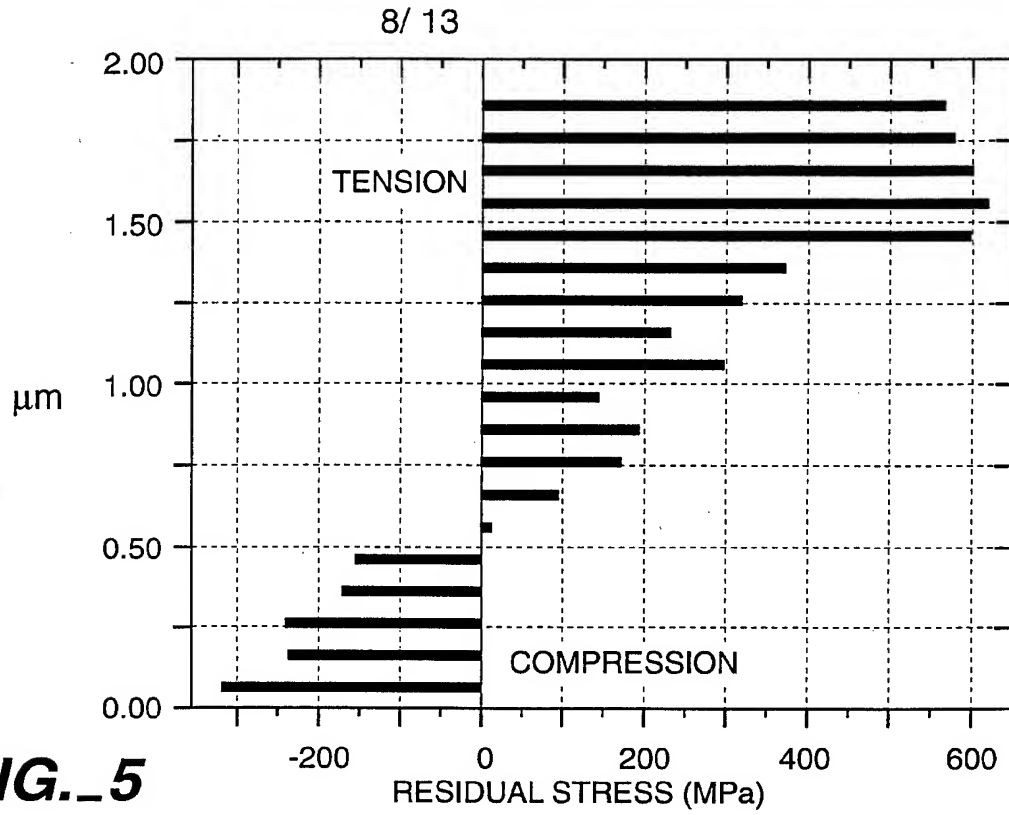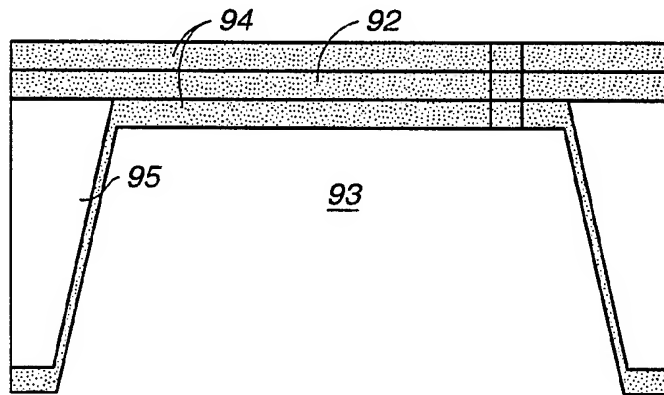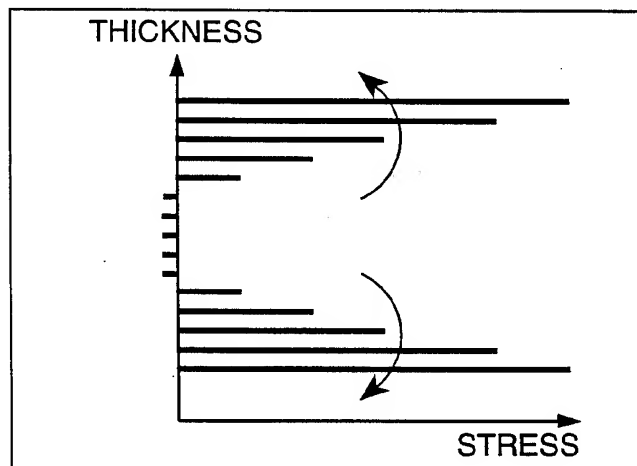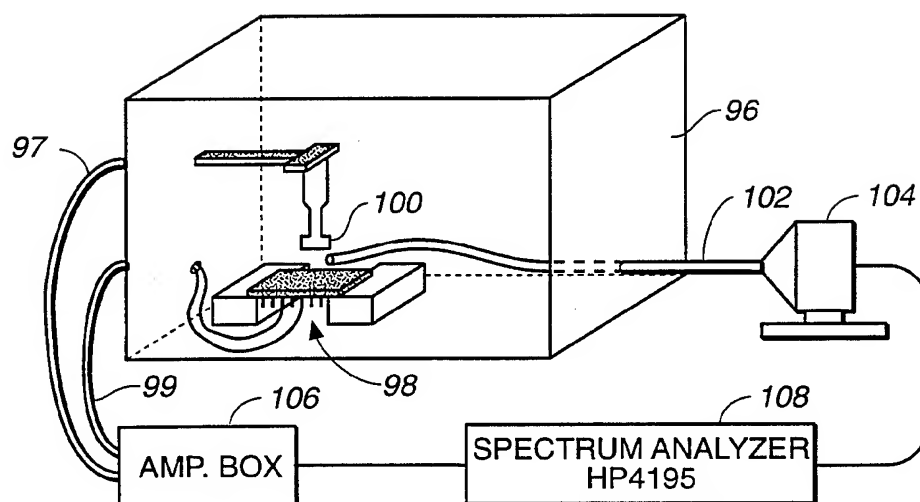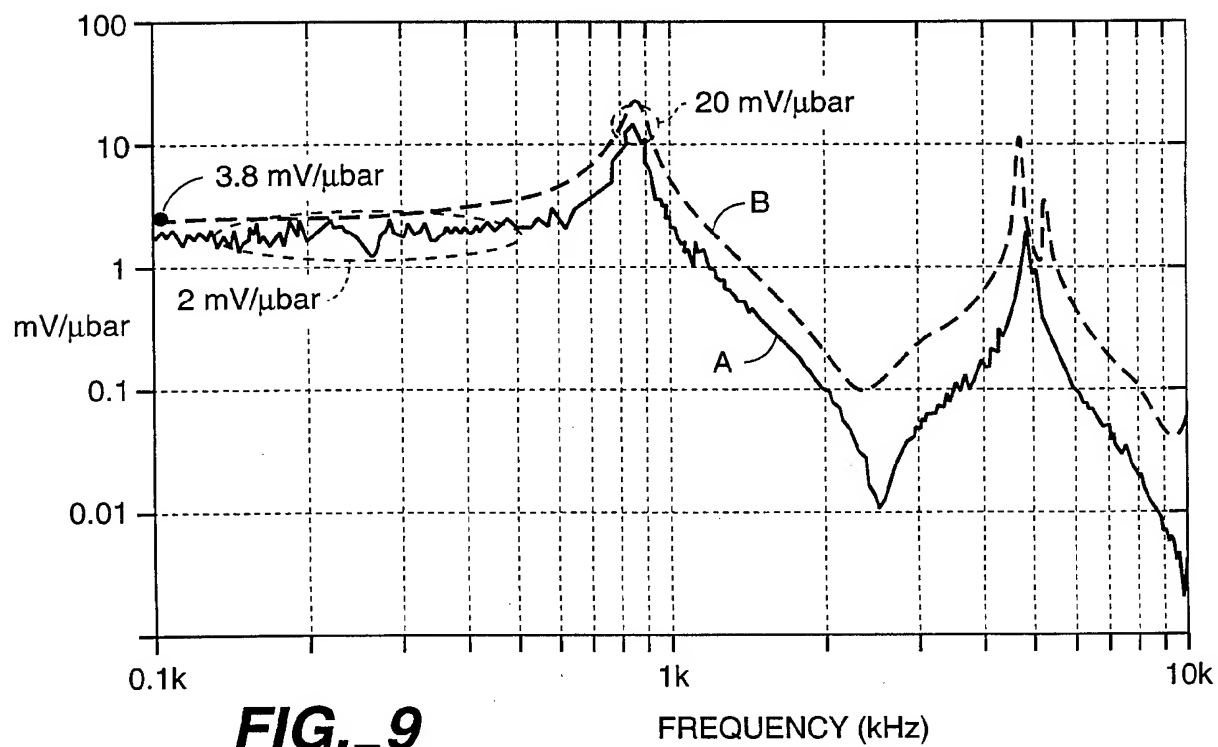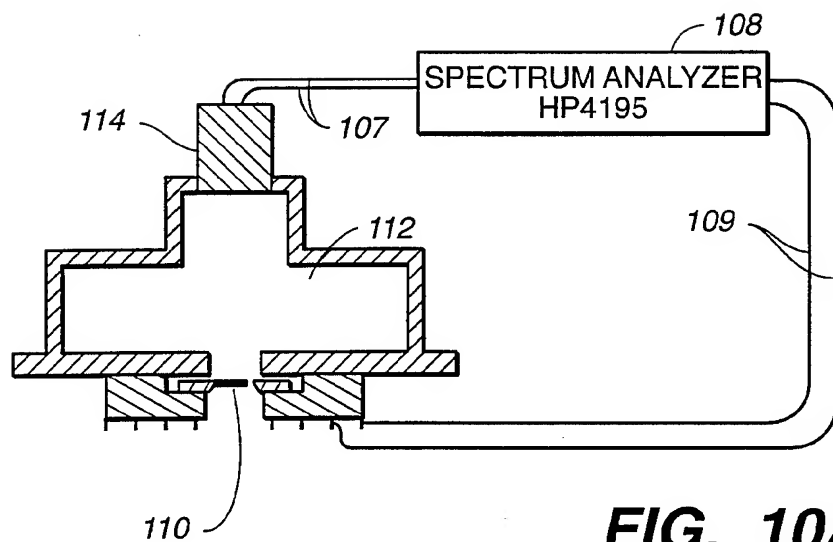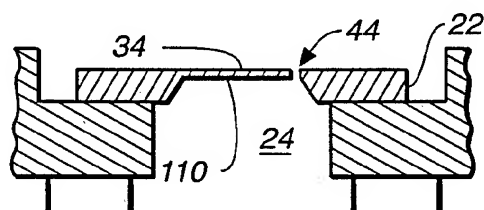
FIG._12
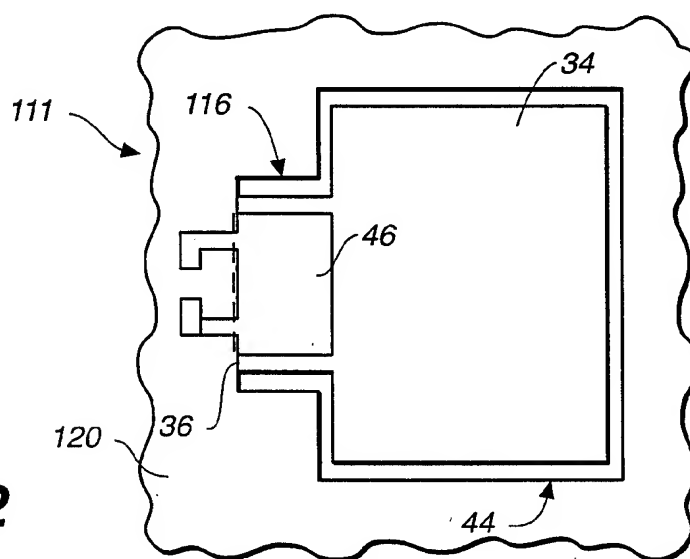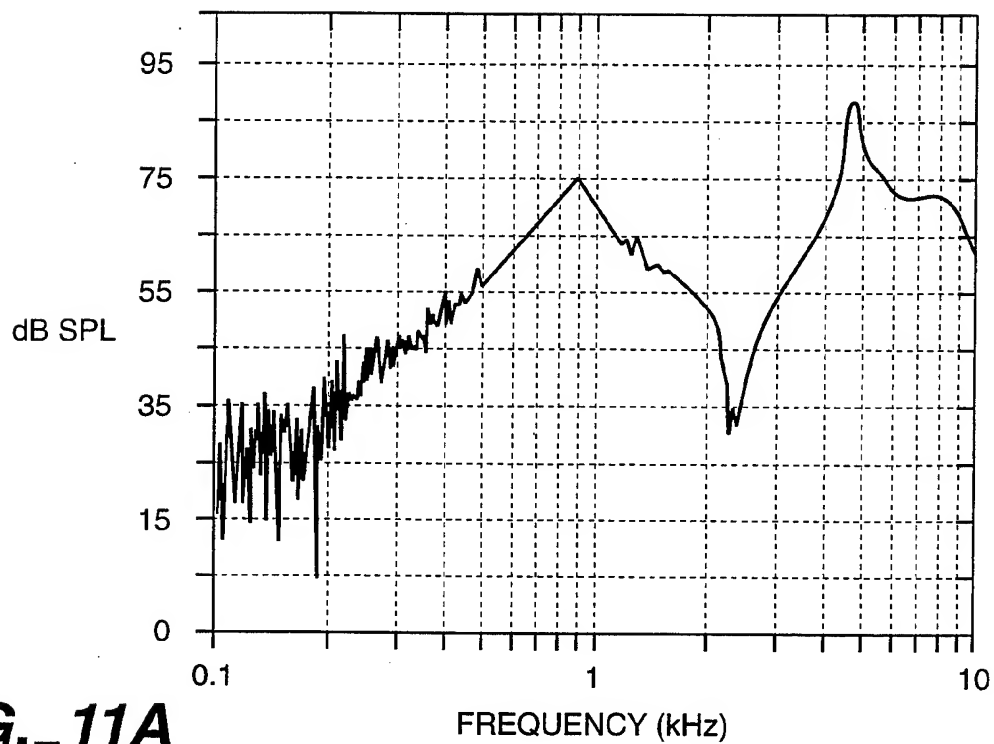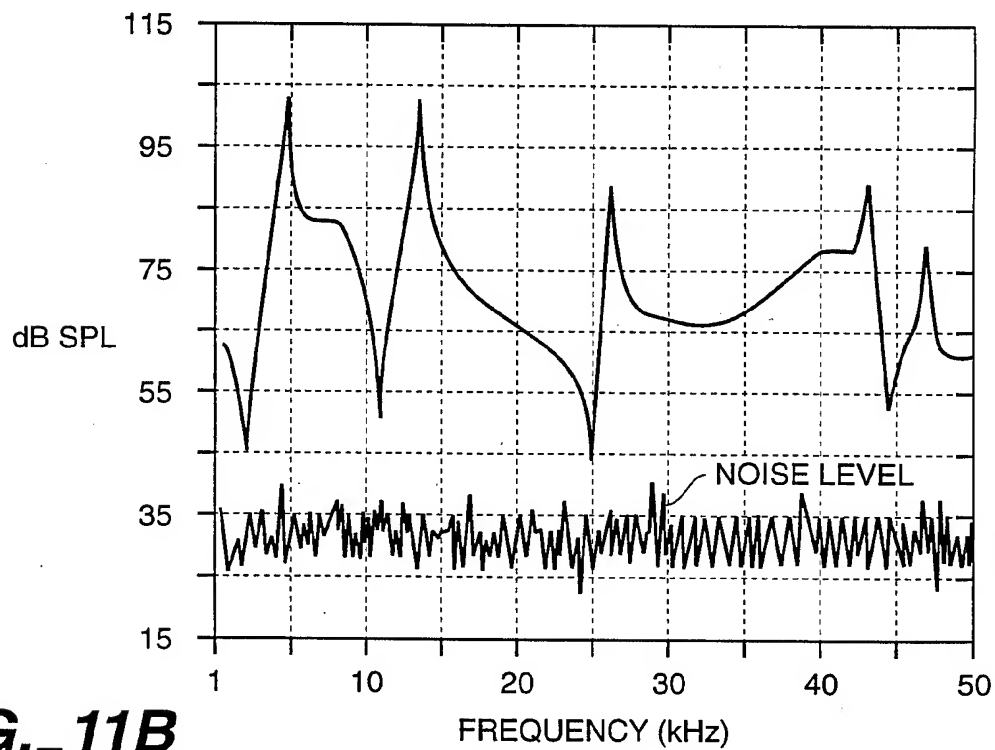
FIG._11A

FIG._11B

FIG._13
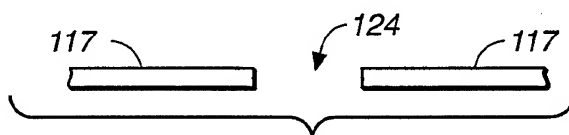
FIG._14A

FIG._14B

FIG._14C

13 / 13
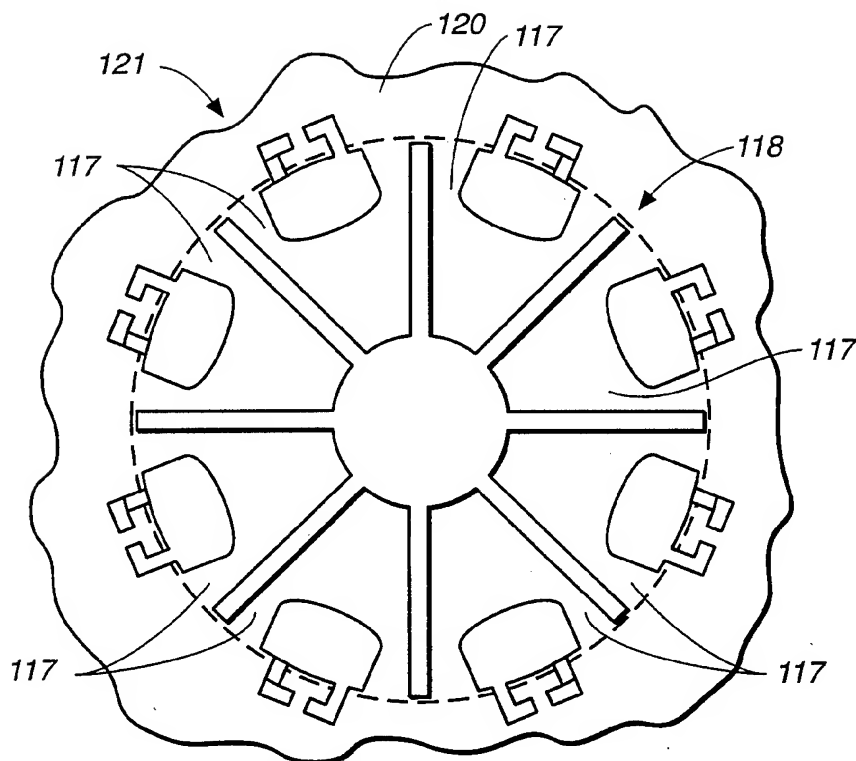
FIG._15
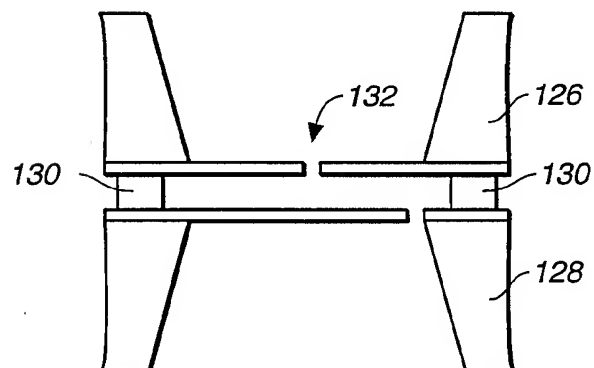
FIG._16

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H01L 41/08, 21/318, 21/306
US CL   :310/328,331,332;311; 29/25.35

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 310/328,331,332,311; 29/25.35

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
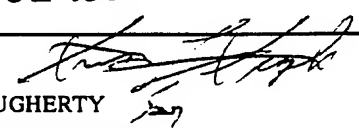
APS Text Search

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --,P Y	US,A, 5,339,289 (ERICKSON) 16 August 1994, figure 2; column 9, lines 30-32;col. 10, 1ines 10-14.	1,3,4,8 ------ 2,5-7,9-13
Y	US,A, 5,072,288 (MACDONALD ET AL) 10 December 1991 figure 1	2,9
Y	US,A, 5,049,775 (SMITS) 17 September 1991 figure 1; column 2, lines 45-50	5-7,10-13
X --,P Y	US,A, 5,138,216 (WOODRUFF ET AL) 11 August 1992, figure 16; figure 3; figure 14	1,4-8,11-14 16-19,21-24 ------ 38,39
A	US,A, 5,162,691 (MARIANI ET AL) 10 November 1992 see figs. 1 and 2	1,5,17,19, 38

[X] Further documents are listed in the continuation of Box C.   [ ] See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 JULY 1995	31 JUL 1995

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer THOMAS DOUGHERTY
Facsimile No. (703) 305-3230	Telephone No. (703) 308-1628

Form PCT/ISA/210 (second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/05519

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A, 5,260,596 (DUNN ET AL) 09 November 1993 see fig. 1.	1,5,6,15,17
A,P	US,A, 5,366,587 (UEDA ET AL) 22 November 1994 see figs. 1A-1J	26-36
A,P	US,A, 5,396,066 (IKEDA ET AL) 07 March 1995 see figs. 1A, 6A, 7	1,14
A	US,A, 5,418,771 (KASANUKI ET AL) 23 May 1995 see fig. 1A, 2, 13, 14	1,5,6,14,16,17
A	US,A, 5,001,933 (BRAND) 26 March 1991 see fig. 5	1,5,6,14,16,17
A	JP,A, 4-186784 (HASEGAWA) 03 July 1992 see figs. 1a-1c, 2, 3	1,5,17,19, 21, 27,38,39